



Nuclear Medicine

www.southernscientific.co.uk



**Southern
Scientific**

EXPERIENCE & EXPERTISE

Gamma Probes

Care Wise C-Trak Apollo Wireless/Wired Gamma Probe 4

Advantage™ ¹²⁵I Diagnostic Seeds 5

Seedseeker 5

Automated Dose Dispensing

Amercare Automated Dose Dispenser 6

Dose Calibrators
and Well Counters

Fidelis Radionuclide Calibrator 7

CRC®-55tR and CRC®-55 PET Dose Calibrators 8

CRC®-55tW Dose Calibrator and Well Counter 9

CAPRAC®-t Well Counter 9

Hidex AMG Automatic Gamma Counter 10

Accessories 11

Phantoms

Pro NM Performance 12

Pro NM Flood 12

Radiation Monitoring

Radhound Multi-purpose Digital Radiation Meter 13

Radhound X/E and X/I 13

Probe Selection Guide 14

Geiger-Müller Probes 15

Dose Rate Geiger-Müller Probes 15

Al and Be Scintillation Probes 15

Scintillation Probes (Al and Be) 16

Alpha/Beta Probes 16

DMC 3000 / DMC 3000 Personal Electronic Dosimeters 16

Dose Rate and X-ray Monitors (T402 and T406) 17

Contamination Monitor (T401) 17

Radhound Mini F Floor Contamination Meter 18

Radhound Mini Digital Contamination Meter 19

Personal Electronic Dosimeters 19

Handhound Voice Activated Monitor 20

Ceiling Monitor 20

Hand, Foot and Clothes Monitors 21

Waste Water Filtration

Radicatch 22

Contrast Catch 22

Contamination Control

Bind-It™ Decontaminant 23

DeconGel 23

Medical Imaging

M3D Ravin Camera 24

Handling, Shielding
and Storage

Tungsten Syringe Shield with Lead Glass Window 25

Lead Glass Syringe Shield 25

Low Energy Vial Shield 26

High Energy Vial Shield 26

Hoy Syringe Carriers 26

Britec Syringe Carriers 27

Acrylic Syringe Shield 27

PET Syringe Shield 27

Straight Tongs 28

Angled Tongs 28

¹⁷⁷Lu Vial Shield 29

Lead-lined Furniture 30

Patient Positioning

FOR-MED Arm, Head and Grip Support 31

FOR-MED Neck / Thyroid Support 31

FOR-MED Knee Support 31

FOR-MED Foot Support 31

Southern Scientific is a leading specialist supplier of radiation detection to the Nuclear, Medical, Security, Defence, Industrial and Research sectors.

We have over 30 years' experience and expertise in providing solutions to the radiation detection industry across all sectors.

Part of the LabLogic group of companies, we work closely with our colleagues to provide honest and simple advice to our customers across the different market areas in order to identify the most suitable detection solution for any requirement or project.



LabLogic
GROUP OF COMPANIES



LabLogic



Southern
Scientific



CareWise



Knight
Imaging



Care Wise C-Trak Apollo Wireless/Wired Gamma Probe

The C-Trak Apollo gamma probe allows for the detection of radiation for use during sentinel node biopsies.

Featuring both wireless and wired connectivity with the same probe, the C-Trak Apollo eliminates any potential issues with connectivity, interference and charging – ensuring surgeries are completed without complication.



- Large touchscreen display for maximum visibility.
- Probes which provide the optimal balance between directionality and sensitivity.
- An automatic transcription of timed counts is stored.
- Save timed counts locally – for retrieval of counts at a later date.
- Fast calibration and enhanced diagnostics quickly ensure correct functioning.
- Multiple probes can be stored within for use in a range of procedures.
- Energy threshold and window technology for a variety of isotopes.
- Built-in user manual.



Advantage™ ¹²⁵I Diagnostic Seeds

The C-Trak Galaxy Gamma Probe System can be used with to help treat patients in a more convenient and accurate way.

The seeds are supplied in pre-loaded needles which saves time, skill, and effort for radiologists as well as minimising the risk of dropping or losing a seed compared to the manual loading of needles.

Advantage™ ¹²⁵I diagnostic seeds offer the following benefits:

- Low activity, pre-loaded in a choice of 5, 7, or 12 cm needles.
- Available in two different activities – 2.4 MBq and 9 MBq
- All loaded needles are supplied sterile with a 180 day shelf life.
- Minimise migration with the option of having the seed loaded alone with a trailing spacer or with the seed and spacer stranded together.

Every order is supplied with:

- A decay chart stating the activity on each day.
- A lead pouch for the safe and easy transport of individual needles.

We can also provide transportation and disposal of your seeds in an efficient and convenient way.



Seedseeker

A compact and ergonomic digital radiation source finder designed specifically for locating ¹²⁵I seeds, the Seedseeker provides the sensitive response needed for the monitoring of low-energy gammas emitted by iodine isotopes.

The meter is turned on-and-off by the trigger on the handle and overcomes many common issues associated with other meters such as excessive weight, cost, and fragility.

The Seedseeker uses a CsI(Tl) Silicon Photomultiplier (SiPM) integrated scintillation detector for a quick and sensitive response. SiPMs, being solid-state devices, exhibit resistance to shocks and vibrations resulting from frequent handling by users. They find widespread use in radiation detection and medical imaging systems.

The compact design involves thousands of micron-sized avalanche photodiodes (APD) arranged in a customised array to achieve optimal optical coupling with the Seedseeker's scintillation crystal. This reduction in size and weight is achieved without compromising counting efficiency.



Amercure Automated Dose Dispenser

The Amercure Automated Dose Dispenser has been developed to completely mimic the manual syringe filling process for dispensing radiopharmaceuticals in unit doses or in multi dose vials.

The ADD enables dispensing operations to be carried out in remote Hot Cell situations where manipulation of syringes and vials by tongs and manipulators is extremely difficult. It is also suitable for bench top applications, Laminar Air Flow Cabinet or Safety Cabinets.

Simply dial up the type of syringe you want to fill and drop the syringe into the tungsten shield. Then enter the volume you want to fill and the ADD loads the syringe, fills the desired volume and presents the syringe to you for removal or recapping. You can add liquid to a previously filled syringe or dispense to vials in multiple aliquots, all with the minimum of manual handling. The ADD also makes recapping the syringe needle simple.

The total time to dispense a single dose from dropping in the syringe to removing the syringe ready capped is typically less than 45 seconds.

The ADD is specifically designed for high activity 511 keV Isotopes and makes light work of the heavy syringe and vial shields that are impossible to manipulate by hand.

- Significantly reduces finger dose in bench-top dispensing situations.
- Total cycle time of 28 seconds to dispense 1 ml, 48 seconds to dispense 9 ml.
- Mimics manual filling pharmacy procedures for vial to syringe and syringe to vial transfers.
- Increases accuracy, repeatability and throughput for dispensing operations where heavy shielding is required.
- Suitable for use with most types of syringes up to 10 ml size.
- Vial shield accepts vials up to 30 ml, custom vial adaptors are available if requested.
- Stainless steel and plastic construction, resistant to most commercially available cleaning and sanitising products.
- Designed for use with 25 mm long needles.



Fidelis Radionuclide Calibrator

The Fidelis is a next generation radionuclide calibrator with unsurpassed accuracy and traceability, and enables rapid, demonstrable compliance with NPL good practice guidance on the assay of radiopharmaceuticals.

The instrument uses our own high resolution, high linearity 'PAM Electrometer Module,' in conjunction with an ionisation chamber designed at the National Physical Laboratory (NPL).

User-friendly interface

The user-friendly interface makes it well suited for use as a reference instrument – to assay samples for calibrating other radionuclide calibrators, thus saving money on calibrators and reference sources.

Meeting national standards

The Fidelis fully certified Secondary Standard ionisation chamber is an identical version of the national standard chamber held at NPL. Each chamber is tested against the master chamber using a range of radionuclides before delivery. The flexible software makes it very easy to update calibration factors for the instrument using data published by NPL.

- Secondary Standard Radionuclide calibrator with full traceability to the UK national standards maintained by NPL.

- Designed to meet or exceed the requirements of The Measurement Good Practice Guide No.93: Protocol for Establishing and Maintaining the Calibration of Medical Radionuclide Calibrators and their quality control (available from NPL).
- Provided with a well liner and removable sample holder for the assay of vial and ampoules.
- Supplied calibrated for more than 60 radionuclides (with the option to add user defined factors, and holders).
- Future proof – Calibration factors for new types of vial or new isotopes can be added using published data. Calibration data stored in chamber.
- Fully automatic self testing and daily checks.
- USB interface for easy connection to a PC.
- Available with either a laptop or desktop PC and optional printers.
- Upgrades available for older systems.

Software

- Comprehensive Windows® software included (XP and Windows 7 compatible), providing a simple to use, unparalleled set of measurement tools.
- Compatible with nuclear medicine management systems (export to MS Excel etc).



CRC®-55tR and CRC®-55PET Dose Calibrators

The Capintec CRC®-55tR and CRC®-55PET Dose Calibrators provide the speed and accuracy you need to measure and prepare doses with excellent reliability and performance.

The design includes a menu driven, colour touch screen interface that is easy to learn and use. Capabilities include storage of reference sources in memory that automatically decay correct for today's time and date.

The Capintec CRC®-55PET Dose Calibrator has reduced chamber pressure and increased bias voltage which increases the maximum activity range for high energy PET isotopes.

- On screen display of nuclide name, number, activity, measure and calibration number.
- Over 80 nuclides with half-lives in memory.
- Built in dose calibration, quality control and self diagnostics.
- Automated QC including constancy and linearity programmes.
- 8" colour VGA touch screen display with high visibility display and full alpha numeric touchpad.
- Optional intelligent programmable remote display.
- Chamber plug and play capability.
- Chamber and remote can be placed up to 30 metres from the readout unit.
- Optional second chamber.
- Maximum activity of up to 250 GBq (CRC®-55tR).
- Maximum activity of up to 740 GBq (CRC®-55PET).



CRC®-55tW Dose Calibrator and Well Counter

The CRC®-55tW provides advanced features with the speed and accuracy you need to measure activity and prepare doses.

- Well counter includes 256 channel MCA with detailed spectrum for ID analysis.
- Automated well QC including chi-square, wipe tests and MDA (manual and automatic ROI).
- Lab tests including: Schillings, blood plasma and volume.
- Performs counting functions for wipe tests in as little as 6 seconds at activities as low as 37 Bq.
- Low activities are measured with a drilled well high sensitivity NaI(Tl) detector.

CAPRAC®-t Well Counter

Performs a wipe test in just 6 seconds (for 1 nCi) and detects extremely low levels of activity with the accuracy only a NaI drilled-well detector can provide.


- 256 channel MCA with detailed spectrum for identification analysis.
- NaI drilled-well crystal detector.
- Automatic energy calibration, constancy check, and background subtraction.
- Automated well QC including chi-square and MDA.
- Manual and Automatic ROI.
- Sets user-definable protocols for wipes.
- Direct readouts with spectrum display are in cpm, dpm, curies and becquerels.
- USB and RS-232 communication ports for PC and printer.
- Compatible with nuclear medicine information management systems via USB.
- Built-in database for test and wipe results as well as QC.



Hidex AMG Automatic Gamma Counter

A automatic gamma counter specifically designed to meet the needs of modern Nuclear Medicine, PET and environmental laboratories. With touchscreen interface and application focused design it guarantees effortless work flow and results simply at your fingertips.

- 3" NaI well type crystal provides superb counting efficiency and optimised lead shielding ensures low background and minimal interference from samples on the conveyor.
- Powerful 2048 channel MCA for detailed spectrum analysis.
- Optional onboard 4 decimal balance means samples can be weighed automatically and results reported as activity per mass or volume. This saves the operator valuable time and prevents transcription errors.
- For short lived isotopes there is an optional foot pedal for precise timing of the sampling.
- Software automatically calculates decay corrected activities.
- All results, raw data and calculated data are exported directly at the touch of a button.

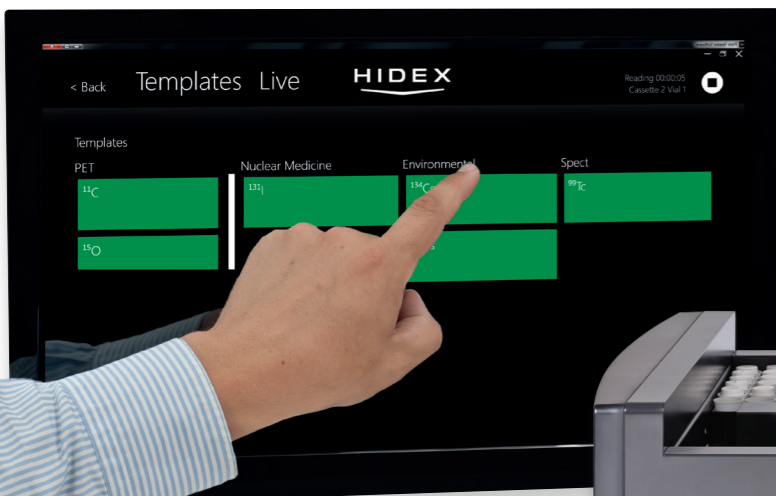

Inserts

Vial/Syringe Samplers (Dipper)

Ensures accurate placement every time. Various dippers available.



Thompson Copper Filter

Allows the 123I activity to be measured accurately in a wide range of syringes.



Chamber Well Insert

Protects chamber well, easily washable with decontaminate. Custom sizes available.



Moly Assay Canister

Measures Molybdenum content of ^{99m}Tc



Brachytherapy Ribbon Holder

Positions ¹⁹²Ir seeds in the dose calibrator.



Brachytherapy Source Holders

Positions ¹³⁷Cs seeds in the dose calibrator.



The products featured are just a selection of the Capintec accessories available. For a comprehensive list please visit our website.

Accessories

Lead Shielding

Nine sets of 6 cm thick lead split rings for full chamber shielding.



Mounting Flange

A must for all hot labs with limited counter space.



Epson Roll Printers

For CAPRAC®-T, CRC®-25W, CRC®-55tW, CAPRAC®, CAPRAC®-R.



Epson Ticket Printer

For CAPRAC®-T, CRC®-25W, CRC®-55tW, CAPRAC®, CAPRAC®-R.



Calicheck Linearity Test Kit

Accurately tests linearity in less than ten minutes.



Pro-NM Performance

The ideal phantom for NM and PET systems performance evaluation (collimator, artifacts, calibration, reconstruction parameters), it can be used to evaluate, for example: centre-of-rotation error, non-uniformity artifacts, changes of radius-of-rotation on spatial resolution, reconstruction filters on spatial resolution, attenuation and scatter compensation.

Main Cylinder

- Inside cylinder diameter: 206 mm
- Inside cylinder height: 186 mm
- Cylinder wall thickness: 7 mm

Cold Rods Insert

- Rod diameters: 4.8, 6.4, 7.9, 9.5, 11.1 and 12.7 mm
- Height of rods: 88 mm

Cold Spheres

- Solid sphere diameters: 9.5, 12.7, 15.9, 19.1, 25.4 and 31.8 mm
- Height of the center of the spheres from the base plate: 127 mm

Optional PET Lid with Cylindrical Samples

- Refillable thin-walled cylinders, diameters: 8, 12, 16 and 25 mm
- Water filled cylinder diameter: 25 mm
- Air filled cylinder diameter: 25 mm
- PTFE solid cylinder diameter: 25 mm
- Cylinder height: 38 mm

Pro-NM Autoflood

The Pro-NM AutoFlood is dedicated for weekly inhomogeneity and sensitivity control and acquisition of correction matrices.

- Fully automatic mixing with integrated circulation pump including air chambers for pressure compensation.
- Compact, closed system.
- Measuring areas made of glass/acrylic glass composite design.
- Optional positioning cart for different camera systems.
- Dimension of the cuvette: 545 x 630 x 80 mm
- Dimension with attachment parts: 635 x 630 x 90 mm
- Filling quantity approx. 12 litres
- Weight empty approx. 21 kg
- Operation weight approx. 31 kg
- Effective field of view: 400 x 540 mm
- Total field of view: 440 x 580 mm
- Low voltage (12V wall plug transformer) power supply.
- Mixing time: 4 minutes.



Radhound Multi-purpose Digital Radiation Meter

A multi-purpose digital radiation survey meter suitable for all your contamination monitoring and radiation protection requirements, the Radhound is a cost effective, feature packed digital radiation monitor that is simple and easy to use.

Count rate is displayed in large clear numbers and also on a bar scale. Our smart averaging software means a steady display that can be read with confidence, yet provides a fast response.

For source finding, one button push changes the display to a histogram plot. Alpha and Beta/Gamma counts can be displayed separately or on the same screen.

For surveying operations the Radhound also has an integrator mode.

- Clear digital LCD display with backlight.
- GM and scintillation detector options.
- Scaler timer function.
- Ergonomic tilt stand.
- Wall mountable.
- Fully adjustable alarm levels.

Radhound X/E and X/I

The Radhound X/E is an advanced hand-held general purpose radiation monitor, suitable for a wide range of probes. The X/I is a Radhound with an internal dose rate detector.


This feature-packed instrument boasts some unique features, such as the ability to switch between probes via the menu allowing, for example, a dose rate probe and a contamination probe to be configured for use with one instrument. This flexibility allows any standard probe to be used (300 - 1200 V).

- Clear digital LCD display with backlight.
- GM and scintillation detector options.
- Fully adjustable alarm levels.
- Scaler timer function.
- Multiple probe library/configuration.
- Peak mode.
- Over range



Probe Selection Guide

All Radhound monitors are compatible with a range of probes to meet your detection requirements. Southern Scientific supply a selection of probes with a variety of different detectors. Use the guide below to determine which probe (or probes) is best for you, or call to speak with one of our product specialists.

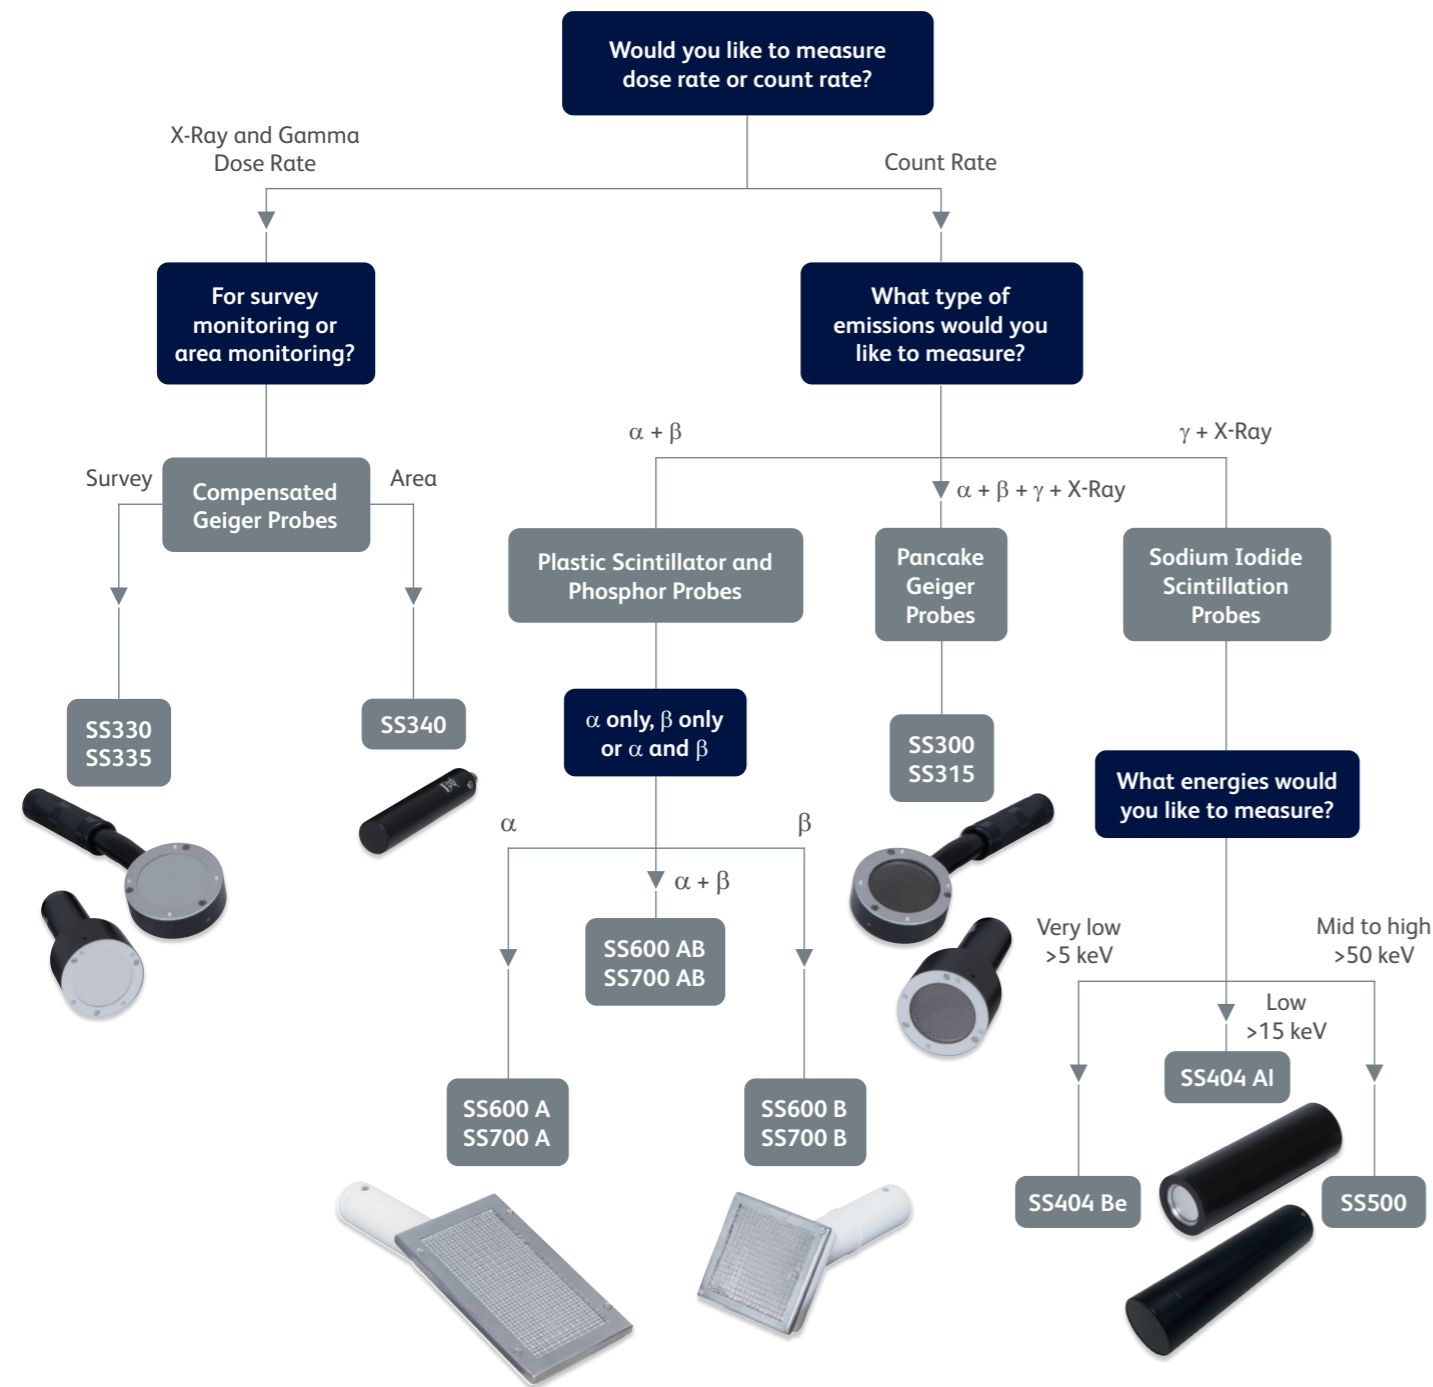

Geiger-Müller Probes

The SS300 is an uncompensated pancake Geiger-Müller-based probe for alpha beta and gamma contamination measurement.

The SS315 is functionally identical to the SS300 but with a different probe geometry.



Geiger-Müller Dose Rate Probes

The SS330 probe is an excellent general purpose end window compensated pancake Geiger-Müller probe with H*(10) energy compensation, which permits reliable measurements from ambient background up to 1 $\mu\text{Sv/hr}$.

The SS335 probe is functionally identical to the SS330, but with a different probe geometry.


The SS340 is a side-window Geiger-Müller probe for ambient gamma radiation measurement to H*(10). Dose rate range is 0 - 2 mSv/hr and energy range 45 keV - 2 MeV.



Scintillation Probes (Al and Be)

The SS404 Al is equivalent to the Mini 44A. This probe incorporates a $\varnothing 1.25" \times 0.098"$ (32 x 2.5 mm) thick NaI(Tl) crystal mounted on an aluminium window and is fitted with an internal 3.15 mm lead collimator to reduce background counts.

The SS404 Be is similar to the SS404 Al but is fitted with a beryllium window, which extends the low energy response down to 5 keV, making it suitable for counting ^{55}Fe .

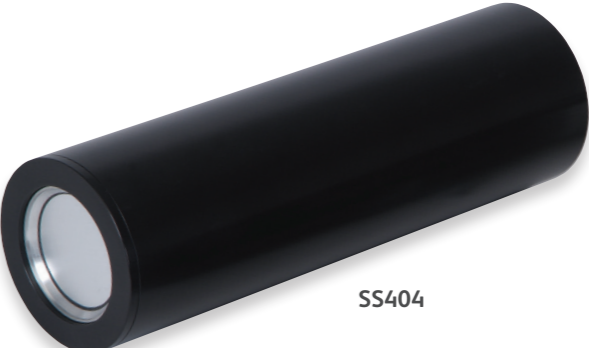

Gamma Scintillation Probe

The SS500 is a very sensitive end-window gamma scintillation probe.

Equipped with a $\varnothing 1" \times 1"$ (25.4 x 25.4 mm) NaI(Tl) crystal, it is designed to provide a cost effective gamma monitor for energies of 50 keV upwards.

Alpha/Beta Probes

Equivalent to the NE BP6 / AP2, there are three versions of these 100 cm² window probes available:

- SS600 A Alpha only (Zinc sulphide layer).
- SS600 B Beta only (Plastic scintillator).
- SS600 AB Alpha/Beta (Zinc sulphide bonded to a plastic scintillator).

The use of a plastic scintillator avoids the traditional use of anthracene in this application, with a comparable response.

Also available are a series of three ergonomically balanced probes with a square window of 50 cm² and a 64° angled handle which are equivalent to the NE BP7, these are:

- SS700 A Alpha only (Zinc sulphide layer).
- SS700 B Beta only (Plastic scintillator).
- SS700 AB Alpha/Beta (Zinc sulphide bonded to a plastic scintillator).

DMC 3000 / DMC 3000 Personal Electronic Radiation Dosimeter

The DMC 3000 Personal Electronic Radiation Dosimeter features superior gamma and X-ray energy response, programmable alarms with visual LED, audible, and vibrating alarm indicators, simple 2-button navigation, and the ability to be fitted with external modules for expanded capabilities.

The DMC 3000 has a complete line of attachable modules that expand the detection and communications capabilities of the dosimeter these are: DMC 3000 Beta Module, DMC 3000 Neutron Module and DMC 3000 Telemetry Module.

- Designed for ruggedness and durability.
- Loud audible alarms, coupled with ultrabright LEDs and vibration capability.
- Simple 2-button operation and navigation of display options.
- Meets or exceeds applicable IEC and ANSI standards.
- Operates for up to 9 months on a single standard AAA battery.

The add-on PRD Module attaches to the DMC 3000 dosimeter and provides radiation counting information for source and hot spot location assessment, while providing dosimetry protection to the operator. It is powered by the DMC 3000 for over 1000 hours of use.



Contamination Monitor (T401)

Designed to meet the challenge of combining operational reliability with excellent sensitivity the T401 offers a range of features including direct surface, peak and background readings. It can be used one-handed, or detach the probe for two-handed operation.

The T401 can be supplied with an extension pole kit to securely deploy the detector probe during monitoring operations.

- Dual bar graph meter display 0 - 1000 cps.
- Digital numeric display with automatic direct translation to Bq/cm² for 14+ pre-programmed nuclides (natural and man-made) including ¹⁴C, ³²P, ¹³⁷Cs.
- Optional extension arm.
- Detachable probe.
- Background reading and storage.
- Audible response with adjustable alarm thresholds.

Dose Rate and X-ray Monitors (T402, T406)

The T402 and T406 are lightweight, yet robust and comfortable to use over extended periods.

- T402 detects gamma and X-rays from 60 keV - 1.33 MeV.
- T406 detects gamma and X-rays from 17 keV - 1.33 MeV.
- T402HR – extended range for high dose rates.
- Digital bar graph display: 0.1 - 1000 μ Sv/h.
- Digital dose rate indication: 0 - 10,000 μ Sv/h.
- Peak dose rate memory – allows maximum exposure levels to be recorded.
- Accumulated dose rate memory – for risk assessment and total exposure.
- Audible response with adjustable alarm thresholds.
- Water-resistant so easy to clean and decontaminate.
- Shock and drop tested so highly durable.



Radhound Mini F Floor Contamination Meter

The Radhound Mini F is an extension of the Mini, providing the same cost-effective and intuitive solution with a pole-mounted detector allowing the instrument to be used as a floor monitor.

The Mini F has the same intuitive operation and functionality as that of the standard model. Users can measure tight and low areas from a standing position, whilst reducing exposure. It is lightweight and well balanced, ensuring that the system can be used comfortably for long periods of time.



Radhound Mini Digital Contamination Meter

A lightweight digital radiation survey meter dedicated to Nuclear Medicine contamination monitoring, the Radhound Mini is a cost-effective and intuitive solution designed ergonomically for ease of use, and providing the sensitive response needed for the monitoring of gamma contamination.

- Clear LCD display with backlighting.
- NaI(Tl) scintillation detector for sensitive contamination monitoring measurements.
- A USB-C connection to charge NiMH AA-cell batteries, which can be easily swapped if needed.
- Fully adjustable alarm levels.
- Count rate displayed in large clear numbers and also on a bar scale.
- Optional sounds.
- Integrator function.



Tracerco Personal Electronic Dosimeter (PED)

Ideal for users who are not specially trained to measure radiation exposure, the PED family have been specially designed to be easy to use and understand.

Encased in weather, shock, and drop-proof housings each PED features a smooth clean design and simple to use DoseVision™ software.

- One button operation.
- Large screen displaying dose rate, accumulated dose and peak dose rate.
- Multiple languages.
- Easy to change between multiple users.
- Rated water resistant as per IP67.

PED-Blue (Ideal for Hospitals and Veterinary practices)

- Energy Range: 33 keV to 3 MeV
- Dose Rate Range: 0 - 100 mSv/h
- Battery Life: 300 hours typically with background radiation.
- Weight: 190 g including belt clip.

PED-ER (Extended Dose Rate Range)

- Energy Range: 48 keV to 3 MeV
- Dose Rate Range: 0 - 1 Sv/h
- Battery Life: 300 hours typically with background radiation.
- Weight: 190 g including belt clip.

PED+ (with GPS)

- Energy Range: 33 keV to 3 MeV
- Dose Rate Range: 0 - 100 mSv/h
- Battery Life: 300 hours typically with background radiation.
- Weight: 190 g including belt clip.
- Wireless connectivity.
- Hand-held dose rate survey meter mode.
- Ability to connect to mobile phones.




Handhound Voice Activated Monitor

Designed for use in 'wet-chemistry' radio-isotope handling situations where hands could be contaminated, the mains-operated Handhound voice activated monitor is an ideal solution.

A touchscreen interface is also incorporated to allow configuration and manual triggering if needed.

- Entirely voice operated to avoid instrument contamination.
- Sensitive scintillation counter for gamma emitters.
- Automatic background updates.
- Fixed or dynamic alarm thresholds.
- Alternative detector options covering wide range of nuclides.
- Stainless steel housing for ease of cleaning and decontamination.
- Automatic record keeping against user names, to aid with HSE compliance.
- Touch-screen compatibility included as an alternative to voice operation.
- Data can be downloaded onto USB.

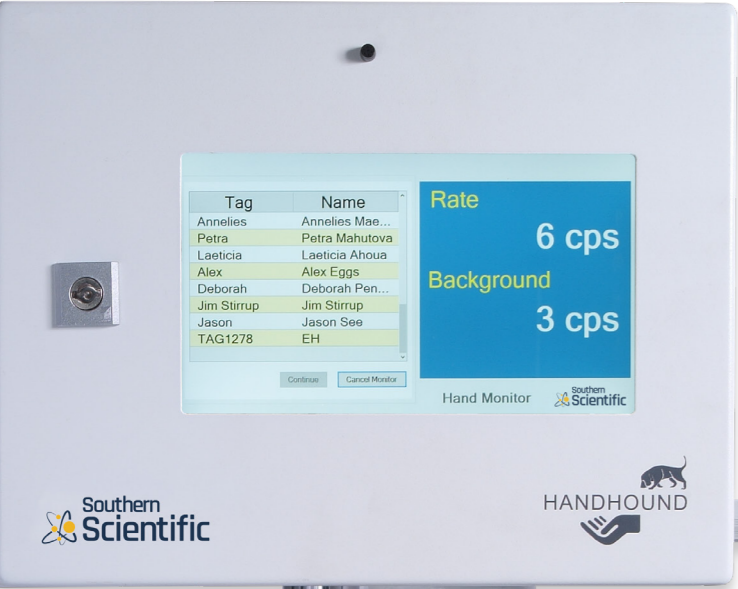


Ceiling Monitor

Typically the monitoring detector(s) is mounted in the ceiling (generally behind the ceiling tiles). A lead shield is used to collimate the detector to improve measurement response.

The systems are available with a range of optional detector configurations, the selection of which are dependent on the application, i.e. the isotope of interest, the expected activity range to be measured and the distance to the patient bed.

The system has two key advantages:

1. To follow ALARA regarding unnecessary exposure to staff.
2. Improve security and safety – with assurance that the patient is resident in the therapy ward.

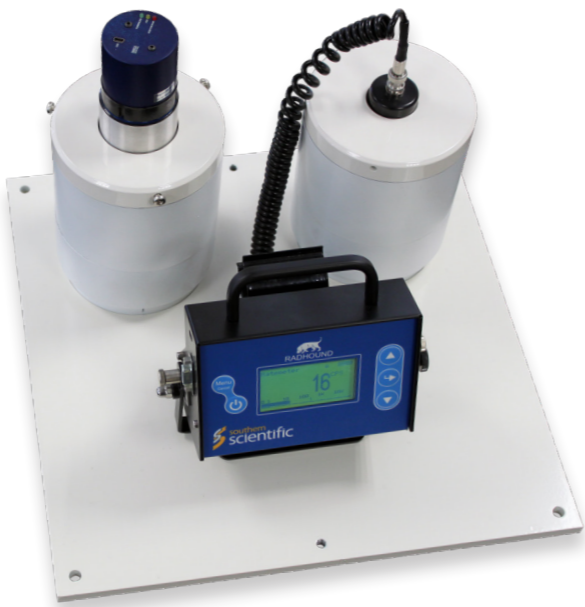

Hand, Foot and Clothes Monitors

The HandFoot-Fibre monitors are used for contamination screening of hands, feet and clothes for alpha, beta and gamma radiation. Due to their weight and agility these monitors are used in circumstances which do not require a full body monitor or for mobile monitoring purposes. The monitor's eight detectors are based on the state-of-the-art Mirion fibre detector technology, enabling a fast and reliable measurement process, even in high or fluctuating background conditions.

There are three versions available:

- HandFoot-Fibre™ XL with alpha and beta sensitive RFD485 fibre detectors for the use in all nuclear environments.
- HandFoot-Fibre™ A+ with RFD485 A+ detectors, featuring a discrimination of alpha and beta radiation.
- HandFoot-Fibre™ MED featuring HybridFibre™ detectors, which are sensitive to alpha, beta and gamma radiation and particularly well suited for medical applications.

Features:

- Outstanding detector sensitivity and homogeneity.
- Economic and robust operation and maintenance.
- 100% gas-free.
- Very short measurement time.
- Easy and intuitive usage.
- Touch screen and audio interface.
- Detachable probe for monitoring of clothing.
- Wheels for easy transport.
- Optional RFID Card Reader for easy operator recognition.

Medical application

HandFoot-Fibre MED has been developed for medical applications. The HybridFibre™ detectors are detecting alpha, beta, and gamma radiation with a particularly high sensitivity for low energy radiation (up to 30 keV). In handling medical isotopes like ⁵⁷Co-, ^{99m}Tc, or ¹²⁵I the HandFoot-Fibre MED is an expert. A nuclide database is provided, and can be extended with user's own entries. The monitor applies to the EMC requirements of laboratory medicine.



RadiCatch

The RadiCatch toilet filtration system is a unique all-in-one toilet and filter that functions stand-alone or as part of the sewage system. It is safe and comfortable for patients and staff, and provides hospitals with an economical, environmentally friendly alternative to decay tanks.

By removing 99.99+ % of excreted radioactivity produced by various radionuclide therapies, the RadiCatch provides hospitals with increased treatment capacity. It also removes the need to shield sewages or manage complex decay tanks. The system is compact and can be fitted into a patient room or outpatient ward.

- The RadiCatch only needs to be plumbed in and provided with a 220 V electrical supply.
- 4G allows remote access and control. The system's touchscreen is easy to use for both patients and staff.
- By flushing the toilet using a vacuum, the RadiCatch is compact and reduces the amount of water needed to operate.
- The system has an automatic internal disinfection function.
- The RadiCatch uses two consumable filter sets, which are clean, safe, and easy to change. Filter 1 is used for prefiltration of faeces and toilet paper while Filter 2 removes the radioactivity.
- The filtered water is held in a buffer tank held in a trolley. The tank is easy to change and empty, and can be sampled for testing if required.
- The whole system's footprint is only 40 D x 80 W cm.

ContrastCatch

Contrast agents are dosed in large quantities and also quickly excreted by patients. This makes contrast agents measurable in the environment everywhere, harmful to the environment and a risk to drinking water supplies.

The ContrastCatch was specially developed for radiology departments. After a short stay and one or more toilet visits afterwards, 40 – 50% of the administered contrast agents is excreted by the patient, exclusively through urine. Therefore, this system treats only the urine. The filters are suitable for recovery of valuable resources and reuse.



Bind-It™ Decontaminant

Bind-It™ Decontamination Fluid has a unique affinity for ^{123}I / ^{125}I / ^{131}I . The strong attraction binds the radioiodine and suspends it in solution so that when combined with water it becomes a subsidising cleaner. This 'lifts' dirt and residual radioiodine off surfaces so it can be easily wiped away.

- Safe for use on delicate well counter detectors, thyroid probes, survey meters and gamma camera heads.
- Available as a concentrated cleaner, ready-to-use spray and a hand soap, all in convenient 237 ml and 946 ml sizes.



DeconGEL

A range of easily peelable decontamination gels to suit all applications. Effective on a vast range of smooth and porous surfaces, encapsulating and removing up to 99% of loose and fixed contamination.

- In addition to industrial decontamination, the gels can be used to fix contamination or to form a protective barrier.
- Extensively used to recommission contaminated instruments and glove boxes.
- Film can be analysed in a laboratory afterwards by HPGe or LSC.
- Cleaner, more effective and safer than alternative decontamination methods.
- Minimises contaminated waste output.

M3D Ravin Camera

The Ravin Camera provides real-time monitoring and imaging of multiple radiation sources. Suitable for identifying areas of contamination in treatment rooms and toilets, surveying shielding, imaging patients during and post procedure, this portable unit can quickly determine the location of contamination, allowing staff to clean up accurately and in a timely manner.

- Identify location/extent of residual activity.
- Imaging of organ specific uptake.
- Extravasation identification and visualisation.
- Identify radioisotope and activity of contamination.
- Image contamination at distance up to 50 ft.
- Reduces risk of unknown exposures to staff and patients.



Tungsten Syringe Shield with Lead Glass Window

Available with two different types of locks: Spring Lock and Twist Lock.

Spring Lock – encloses the syringe by pushing a button to release a small raised point that attaches the syringe into the sleeve.

Twist Lock – encloses the syringe by twisting the syringe into the two flanges that attaches the syringe into the sleeve.

Screw Lock – encloses the syringe using an external screw to lock the syringe into place (only available on volumes 10 mL and above).

The Tungsten Syringe Shield is designed for all types of syringes and for the following sizes: 1 ml, 2 ml, 2.5 ml, 3 ml, 5 ml and 10 ml.



Lead Glass Syringe Shield

The Hoy Scandinavian Lead Glass Syringe Shield is designed to offer the best mix of personal protection and a high functionality, whilst providing the perfect fit for the syringe. They are most suitable for nuclear medicine imaging departments.

Available with two different types of locks: Spring Lock and Twist Lock.

Spring Lock – encloses the syringe by pushing a button to release a small raised point that attaches the syringe into the sleeve.

Twist Lock – encloses the syringe by twisting the syringe into the two flanges that attaches the syringe into the sleeve.

Screw Lock – encloses the syringe using an external screw to lock the syringe into place (only available on volumes 10 mL and above).

The Lead Glass Syringe Shield is designed for all types of syringes and for the following sizes: 1 ml, 2 ml, 2.5 ml, 3 ml, 5 ml, 10 ml, 30 ml and 50 ml.



Specifications	
Lead Glass High Density	5.2 g/cm ³
Thickness	5.5 mm

Low Energy Vial Shield

Developed for low activity whilst offering complete 360° visibility at all times, this shield is designed to protect the user against radiation when working with syringes and vials.

The top is close-fitting thanks to the use of magnets, and is opened with a light twist. Tungsten is incorporated in the top and bottom to increase safety and cut down on weight.

Specifications	
Glass Thickness	12.5 mm, equivalent to 4 mm of lead
External Dimensions	65 x 95 mm
Internal Dimensions	30 x 60 mm
Weight	1.1 kg
Capacity	Fits 5 - 30 ml vials

High Energy Vial Shield

Developed for high activity and featuring extra thick, 20 mm lead glass whilst offering complete 360° visibility at all times, this shield is designed to protect the user against radiation when working with syringes and vials.

Specifications	
Glass Thickness	19.5 mm, equivalent to 6.4 mm of lead
External Dimensions	79 x 95 mm
Internal Dimensions	31 x 60 mm
Weight	1.7 kg
Capacity	Fits 5 - 30 ml vials

Hoy Syringe Carriers

Designed for storage and transportation of syringes with radioactive content, while protecting the user against radiation.

Supplied with a practical handle, a lock and magnetic separators are available as accessories.

Specifications	
Tungsten Thickness	Minimum 2 mm
Glass Thickness	8 mm (density 5.2)



Britec Syringe Carriers

Ideal for transporting loaded syringes and/or small radioactive sources these carriers are constructed from a steel powder coated box lined with lead.

All carriers are supplied with a choice of fixed or pivoting handle. The pivoting handle is locked in the upright position when carried. All carriers are fitted with an internal, removable, rigid plastic tray. The internal length of the carriers is designed to accept a loaded 10 ml syringe fitted with a 25 mm capped needle. 100 mm handle clearance from lid.

- Lead sizes come in either 3 mm or 6 mm.
- The hinged lid is fitted with a front fixing catch which can be wired and sealed for security.



Acrylic Syringe Shield

Developed to combine user friendly functionality with high safety, the Hoy Acrylic Syringe Shield is designed for working with syringes and injection of beta isotopes.

Made of 10 mm acrylic plastic, the transparent material makes it possible to see the syringe inside.

- 100% acrylic plastic.
- Fits many different types of syringes, including BD Plastipak, B Braun and Terumo.
- Locking mechanism – Spring lock.



PET Syringe Shield

The Hoy Scandinavian PET Syringe Shield provides the user with optimal radiation shielding during PET / MR or PET / CT procedures.

Magnetic / non-magnetic with two different types of locks: Spring Lock and Twist Lock.

Spring Lock – encloses the syringe by pushing a button to release a small raised point that attaches the syringe into the sleeve.

Twist Lock – encloses the syringe by twisting the syringe into the two flanges that attaches the syringe into the sleeve.

Available for the following syringe sizes: 1 ml, 3 ml, 5 ml, and 10 ml.

- Shielding: 10 mm tungsten.
- Weight: 750 g (1 ml)



Straight Tongs

Available in two variants.

- Short model (160 mm from handle to claw)
- Long model (265 mm from handle to claw)
- Short claws: 30 mm
- Long claws: 60 mm

Each model can have either long claws or short claws.

Order Code	Product
101.060.101.000	Tongs for Vials, w/Spring Grip Short Model w/Short Claws
101.060.102.000	Tongs for Vials, w/Spring Grip Short Model w/Long Claws
101.060.201.000	Tongs for Vials, w/Spring Grip Long Model w/Short Claws
101.060.202.000	Tongs for Vials, w/Spring Grip Long Model w/Long Claws
101.060.601.000	Tongs for Vials, w/Spring Grip for 100 ml Vials
101.060.701.000	Tongs for Vials, w/Spring Grip for 11.5 ml Vials




Angled Tongs

Hoy Scandinavian Tongs are available in different lengths, angles and with different claw types.

The two claws provide an excellent grip of the vial. These are operated by pushing the white disc against the handle to open the claws. The spring locking mechanism then automatically holds the vial until the white disc is pushed back again.

Order Code	Product
101.060.401.000	Tongs for Vials, w/Spring Grip, Angled Model, Right Hand w/Short Claws
101.060.402.000	Tongs for Vials, w/Spring Grip, Angled Model, Right Hand w/Long Claws
101.060.501.000	Tongs for Vials, w/Spring Grip, Angled Model, Left Hand w/Short Claws
101.060.502.000	Tongs for Vials, w/Spring Grip, Angled Model, Left Hand w/Long Claws
101.060.502.000	Tongs for Vials, w/Spring Grip Angled Model w/Short Claws
101.060.302.000	Tongs for Vials, w/Spring Grip Angled Model w/Long Claws

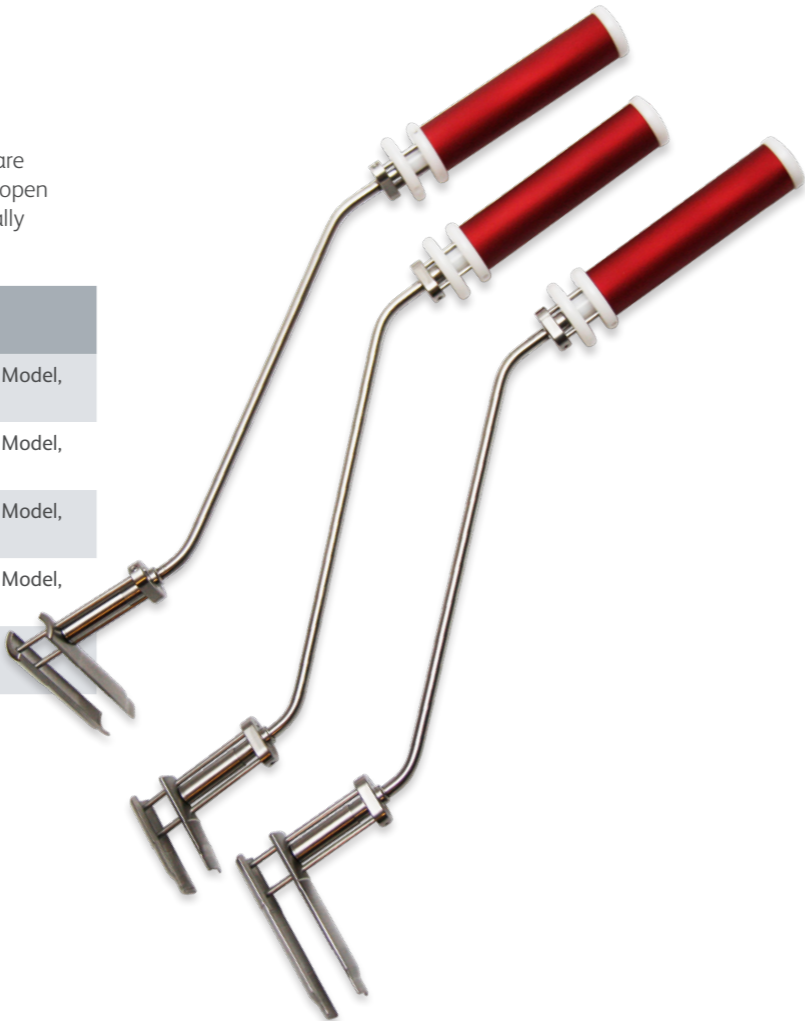

¹⁷⁷Lu Vial Shield

The Hoy Scandinavian ¹⁷⁷Lu Vial Shield provides the user with optimal radiation shielding within all work phases with the use of acrylic and lead glass.

- Lead Glass Thickness: 26 mm equal to 8 mm Pb.
- Outer Dimensions: 94 (dia.) x 120 (H) mm
- Inner Dimensions: 37 (dia.) x 72 (H) mm
- Weight: 2.9 kg

Lead-lined Furniture

Suitable for nuclear medicine departments and radiochemistry labs, our customisable range of lead-lined furniture can be tailored to specific specifications and requirements.

Cabinets, Cupboards and Safes

Custom made to your specification and available in a range of lead thicknesses.

Castles

Designed to shield portable apparatus such as an incubator or centrifuge, our castles are custom made and can be tailored to suit your specification.

Benchtop Screens and Portable Shields

Available in a range of sizes and shielding thicknesses, our L-shaped screens are fitted with cantilevered glass to provide the user with an unobstructed view of the working area whilst still offering maximum protection.

Our portable shields are available in large, tall, and to the floor configurations. Lead encased in a stainless steel structure, they are mounted on castors and fitted with pull handles for easy positioning.

Assemblies and Benches

Modular systems can be supplied to suit any purpose with combinations of storage safes, storage drawers, cupboards, and benches.

Waste and Sharps

Custom made to your specification these lead lined sharp shields can be fitted with either 3 mm or 6 mm lead.


Constructed of steel with a lead lining, the outer surfaces have a durable powder coated finish whilst the inner surfaces are covered with a white plastic liner.



FOR-MED Arm, Head and Grip Support

The FOR-MED arm, head, and grip support is specifically designed for patient comfort and optimal positioning during medical procedures, while maintaining proper alignment and preventing collision between the equipment involved and the patient.

- Head is fixed in a supine position during scans.
- A hand grip can be used to cross the hands for steady positioning.
- Keeps the patient within the equipment's scanning area.

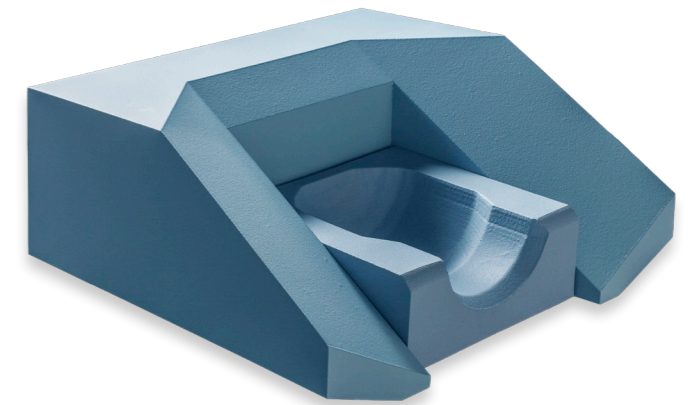

FOR-MED Neck/Thyroid Support

The FOR-MED neck support is used to stabilise and fix the head into position so that when scanning the same viewing angles are given.

- Special foam used for the head support provides extra comfort for the patient, and supports the neck.
- For thyroid scanning, the chin can be tilted backwards for an optimal projection of the thyroid.



FOR-MED Knee Support

Designed for comfortable patient positioning during medical procedures, whilst maintaining proper alignment, the FOR-MED knee angle provides better support to patients when they are positioned on the table.

As a result of bending the knees, the patient's back becomes more convex, allowing it to provide more support during medical procedures.



FOR-MED Foot Support

The FOR-MED foot support is specially designed to facilitate a comfortable position for the patient during medical procedures, while maintaining proper foot alignment.

- Promotes patient comfort.
- Ideal for use during lengthy procedures.
- Contributes to better stability and reproducibility, regarding the target area.



Experts in nuclear medicine and radiopharmacy quality control systems

Southern Scientific is part of the LabLogic Group, a market-leading and award-winning instrument and software provider supporting positron emission tomography (PET), nuclear medicine, and radiopharmacy facilities for over 40 years.

Our systems for radioisotope detection, radiochromatography and quality control are designed and manufactured to help streamline operations and meet with demanding compliance regulations.

ISO Certified

Southern Scientific Ltd is certified to ISO 9001 and ISO 13485 representing the high level of quality assurance and management that we provide at every stage of the supply process, whether a product is distributed on behalf of our trusted manufacturers or constructed in our UK workshop. This accreditation means that our customers can place an order knowing that the delivered product will be suitable for its intended use, fully compliant with EU legislation and in full working order.

All our products are CE marked.



INVESTORS IN PEOPLE
We invest in people Silver

Visit our website



Download the brochure



Southern Scientific Limited

Scientific House, The Henfield Business Park
Shoreham Road, Henfield, BN5 9SL, UK

E-mail: info@southernscientific.co.uk

Tel: +44 (0)1273 497600

www.southernscientific.co.uk

