



Standard Spray: yellow when applied, red contaminant indicator visible under ambient Light



Standard Spray with Fluorescent Additive: contaminant visible under UV-light

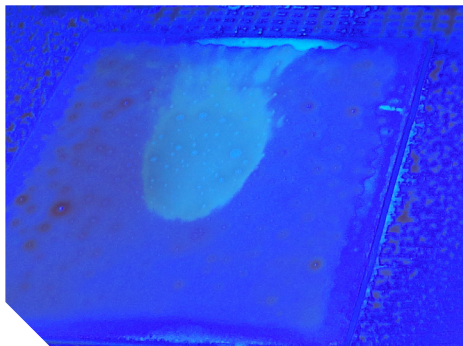

Forensic Spray: translucent when applied under ambient light, contaminant not visible

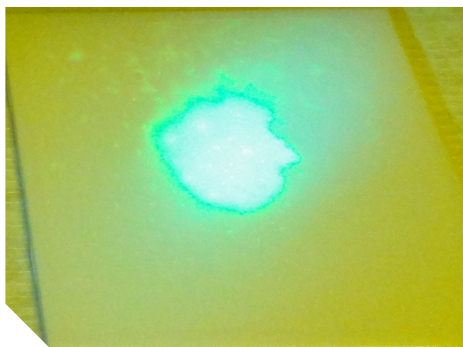

Forensic Spray: contaminant visible under UV-light

# FLIR Agentase C2<sup>™</sup>

## Reveals Chemical Agent Contamination

The FLIR Agentase C2 agent disclosure spray is the most sensitive point detector for chemical nerve agents (G- & V-series) and sulfur mustard (HD). It uses colorimetric technology to reveal the exact location of Chemical Warfare Agent (CWA) contamination on a surface at sub-microgram (trace) levels within five minutes. Once applied to a surface, the standard aqueous spray changes color from yellow to red to indicate the presence of a CWA threat. The color change reveals the exact location of the agent contamination, making the invisible threat visible. An optional fluorescent additive enhances the visual response when used with an ultraviolet (UV) light in poor lighting conditions. The forensic spray is translucent yet allows the threat to be seen under UV-light, a critical feature for covert operations. During the early stages of consequence management, Agentase C2 can be used to detect trace-level contamination before long-term exposure causes harm or loss of life. As part of the decontamination process, it reveals specific hot spots, enabling users to focus and reduce the amount of decontaminant used, lowering costs up to five-fold.

### CUSTOM APPLICATIONS

- First response confirmation
- Sensor validation
- Contamination mapping
- Equipment decontamination assurance
- Sensitive site assessment
- Training exercises

### FEATURES & BENEFITS

- Detects sub-microgram levels of agents within five minutes
- Reveals exact location of agent on surfaces
- Illustrates decon efficiency to reduce costs by up to 60%
- Training completed in less than one hour
- Offered in three applicator sizes based on mission requirements
- Non-destructive allowing for sample extraction and analysis via GC/MS

## Specifications

Agentase C2			
Technology	Enzymes		
Sampling & Analysis			
Sample Introduction	Spray directly onto surface		
Sample Phase	Surface-based detection		
Threats	Enzyme formulations include: nerve agent (V- & G-series) and blister agent (HD); training disclosure spray also available		
System Interface			
Sampling & Analysis	Detection within 5 mins		
Display & Alerts	Colorimetric sensor response; standard and training spray - application is yellow and contaminated surfaces change to red within 5 mins; forensic spray - application is translucent and contamination is visible under UV-light		
Fluorescent Additive	Enhances visual response of standard spray under challenging lighting conditions or surfaces when used with UV-light		
Training Requirements	<1 hour; no special skills required		
Cold Start Time	<3 mins		
Environmental			
Operating Temp	Nerve agent and training formulation: 32 to 113 °F (0 to 45 °C); blister agent formulation: 23 to 113 °F (-5 to 45 °C)		
Cold Weather Additive	Lowers operating temp of nerve agent and training formulations to -4 °F (-20 °C)		
Operating Humidity	0-100%		
Operating Conditions	The response must be read under white light (standard) or UV-light (fluorescent additive and forensic version)		
Surface Compatibility	Large variety of materials, won't degrade sensitive surfaces		
Storage Temp	Store at room temp out of direct sunlight; product expiration is indicated by temp/ time indicator on packaging		
Water Source	Handheld applicator: water included; backpack/cart applicator: tap water ≤250 ppm calcium carbonate and treated for chlorine (chlorine treatment included)		
Life Expectancy	12 hr operational pot-life once prepared; 8 hrs at 104 °F (40 °C); shelf-life >3 yrs when stored below 77 °F (25 °C)		
Waste	Dispose in accordance with local policies for non-hazardous aqueous waste		
Physical Features			
	Handheld Applicator	Backpack Applicator	Cart-Based Applicator
Weight (Full)	Max 1.2 lbs (0.54 kg)	Max 42 lbs (19.05 kg)	Max 230 lbs (104.3kg)
Power	N/A	Compressed air, 4000 psi SCBA or hand powered versions available	Compressed air, 4000 psi SCBA, 120 psi compressor, LMTV compatible
Spray Volume	0.5L	8L	50L
Surface Coverage	5-7m²	50-80 m², ~1-2 HMMWV	550-800m², ~2-15 HMMWV or four M1 tanks
Setup Time	<5 minutes	<10 minutes	<15 minutes
Application Time	30 seconds / m²	<3 minutes / HMMWV	<3 minutes / HMMWV

### HEADQUARTERS

FLIR Systems, Inc.  
27700 SW Parkway Ave  
Wilsonville, OR 97070

### DETECTION SALES, AMERICAS

FLIR Detection, Inc.  
2800 Crystal Drive, #330  
Arlington, VA 22202  
Phone: +1-877-692-2120  
detection@flir.com

### DETECTION SALES, APAC

FLIR Detection, Inc.  
3 Pickering Street #03-49  
Nankin Row  
Singapore - 048660  
Phone: +65-6822-1596  
detection@flir.com

### DETECTION SALES, EMEA

FLIR Detection, Inc.  
Luxemburgstraat 2  
2321 Meer  
Belgium  
Phone: +32 (0) 3665 5106  
detection@flir.com

www.flir.com  
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved. 16-1695-DET Revised 01/2017