

**HIGHLY SENSITIVE, LIGHTWEIGHT
BACKPACK RADIATION DETECTOR (BRD)**
**FLIR identiFINDER®
R700**


The FLIR identiFINDER R700 Backpack Radiation Detector (BRD) offers a hands-free capability for broad-area radiological search and monitoring missions. The identiFINDER R700 provides the user all that is required to successfully perform wide-area searches quickly, efficiently and confidently. Providing the ultimate versatility, the identiFINDER R700 can be placed for stationary monitoring at makeshift checkpoints, fence-line monitoring, and other temporary screening locations. When coupled with radiation monitoring software, the identiFINDER R700 can be used as a fixed-site monitoring tool.

flir.com/r700


**INTERROGATE AND ISOLATE
RADIOLOGICAL THREATS
QUICKLY**

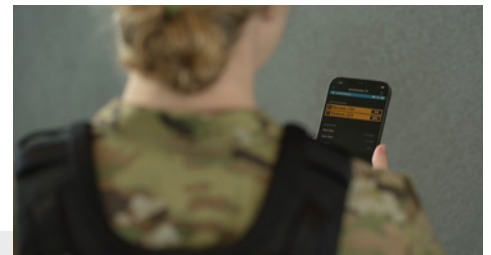
Building on the award-winning identiFINDER R440, the R700 offers an advanced spectroscopic algorithm and detection techniques scaled up to a man-portable backpack for increased sensitivity and speed

- Detect harmful neutrons with NaI or count them with our dual-mode NaI detector without the need for an additional neutron detector
- Large 2" x 4" x 8" detector allows for rapid detection and identification of even the smallest radiation sources; source-less "quantum gain" stabilization improves data collection, reducing false positives
- 360° EasyFinder™ mode collects and interprets data to pinpoint radiation at the source, enabling faster location of threats


**DEPLOY AT THE SCENE OR ON
THE MOVE, COVERTLY**

The R700's capabilities configured as a backpack or a stationary device allow multiple mission sets from wide area searches to temporary check points

- Ergonomic design for all day operator wear- the long battery life and balanced load are designed for extended missions
- Unmarked backpack form-factor and mobile phone-based user interface allow operators to detect radiological threats covertly, even in a crowd
- Included tripod mount enables stationary deployment for remote radiation monitoring. The rugged and weatherproof IP67 design operates in the harshest weather conditions


**SHARE INTELLIGENCE
BROADLY, OR OPERATE
SILENTLY**

Providing critical information to decision makers quickly is essential. The R700 provides the capability to do so in real-time and on demand

- Ability to monitor and control remotely using the Mobile App (iOS (available), Android (future))
- Built-in wireless communications and a robust API enable integration with user-deployed networks. ANSI N42.42 data output is standard for easy integration
- Tethered-display versions will provide a radio silent (air-gapped) option for highly sensitive missions

SPECIFICATIONS

System Overview

Technology	Backpack Radiation Detector (BRD)
Threats	Detects gamma and/or neutron radiation emitted from natural occurrences in the environment, special nuclear material, industrial, or medical material

Technology

Detector	2 x 4 x 8" NaI™ (NaI:Tl, Li) gamma-neutron or 2 x 4 x 8" NaI(Tl) gamma-neutron indication
Typical Resolution	≤8.5% FWHM at 662 keV (20 °C)
Stabilization	Sourceless "Quantum gain" stabilization (patents pending)
Energy Range (Gamma)	10 keV to 10 MeV (All detectors)
Dose rate range (Cs-137)	0.001 mrem/h - 10 rem/h (0.01 - 100,000 μSv/h)
Dose rate range ID mode (Cs-137)	0.001 - 0.5 mrem/h (0.01 - 5 μSv/h)
Dose rate overload range (Cs-137)	0.002 - 10 rem/h (20 - 100,000 μSv/h)
Gamma Sensativity (Cs-137)	165,000 cps/mrem/h (16,500 cps/uSv/h)
Neutron Sensativity	90 cps/nv
Linearization	Real-time linearization of gamma energy
Service Interval	5 year factory maintenance recommended, not required
Standards Compliance	ANSI N42.53 BRD standard fully compliant ANSI N42.42 data format fully compliant IEC 62694 backpack standard fully compliance IEC 62706 BRD environmental compliant IEC 62755 data format fully compliant

Sampling & Analysis

Library Categories	SNM, SNMR, IND, MED, NUC, NORM, UKN
Nuclide Identification	Exceeds ANSI N42.53
Sample Introduction	Absorption of EM gamma (NaI) or gamma and neutron emissions (NaI)
Time to Alarm	From a few seconds to minutes
Time to ID	Depends on gamma exposure; typically < 2 min

Environmental

Operating Temperature	-4 to 122 °F (-20 to 50 °C)
Operating Humidity	10 to 100% non-condensing (IP67)
Storage Temperature	-4 to +104 °F (-20 to +40 °C)
Protection Rating	IP67 according to IEC 60529 (3' (1 m) submersible)

System Interface

Communication	USB 2.0, USB OTG; Bluetooth® Class BLE 4.0 and 2.1 with EDR ≤30m range (can be disabled at manufacture)
Data Storage	32GB internal memory
GPS (removable)	72-channel u-blox M8 engine
Software	On-board web server software
Training Requirements	<10 mins for operator; 1 day for advanced user

Power

Battery Specs	2x rechargeable Li-Ion smartpacks (hot-swappable)h runtime per Li-Ion smartpack; > 9 h runtime with single battery pack > 18 h runtime with dual batteries
Input Voltage	100-240V AC (wall adapter and USB cable supplied)
Cold Start Time	<5 mins from cold start

Physical Features

Enclosure and Protection	Impact resistant plastic; protection rating IP67 according to IEC 60529
Dimensions [L x W x H]	≤17 x 12 x 20 in (≤43.2 x 30.5 x 50.8 cm)
Weight	≤22 lbs (≤10 kg)



For a complete list of specifications, go to flir.com/r700

PORTLAND
27700 SW Parkway Ave.
Wilsonville, OR 97070
PH: +1 877.773.3547

DETECTION SALES, APAC
10 Kallang Avenue #09-10
Aperia Tower 2
Singapore 335910
PH: +65-6822-1596

DETECTION SALES, EMEA
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5106

www.teledyneflir.com

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2021 Teledyne FLIR LLC. All rights reserved. Created: 05/07/2021

21-0335-DET-identiFINDER R700 Datasheet - A4

TELEDYNE FLIR
Everywhere you look™